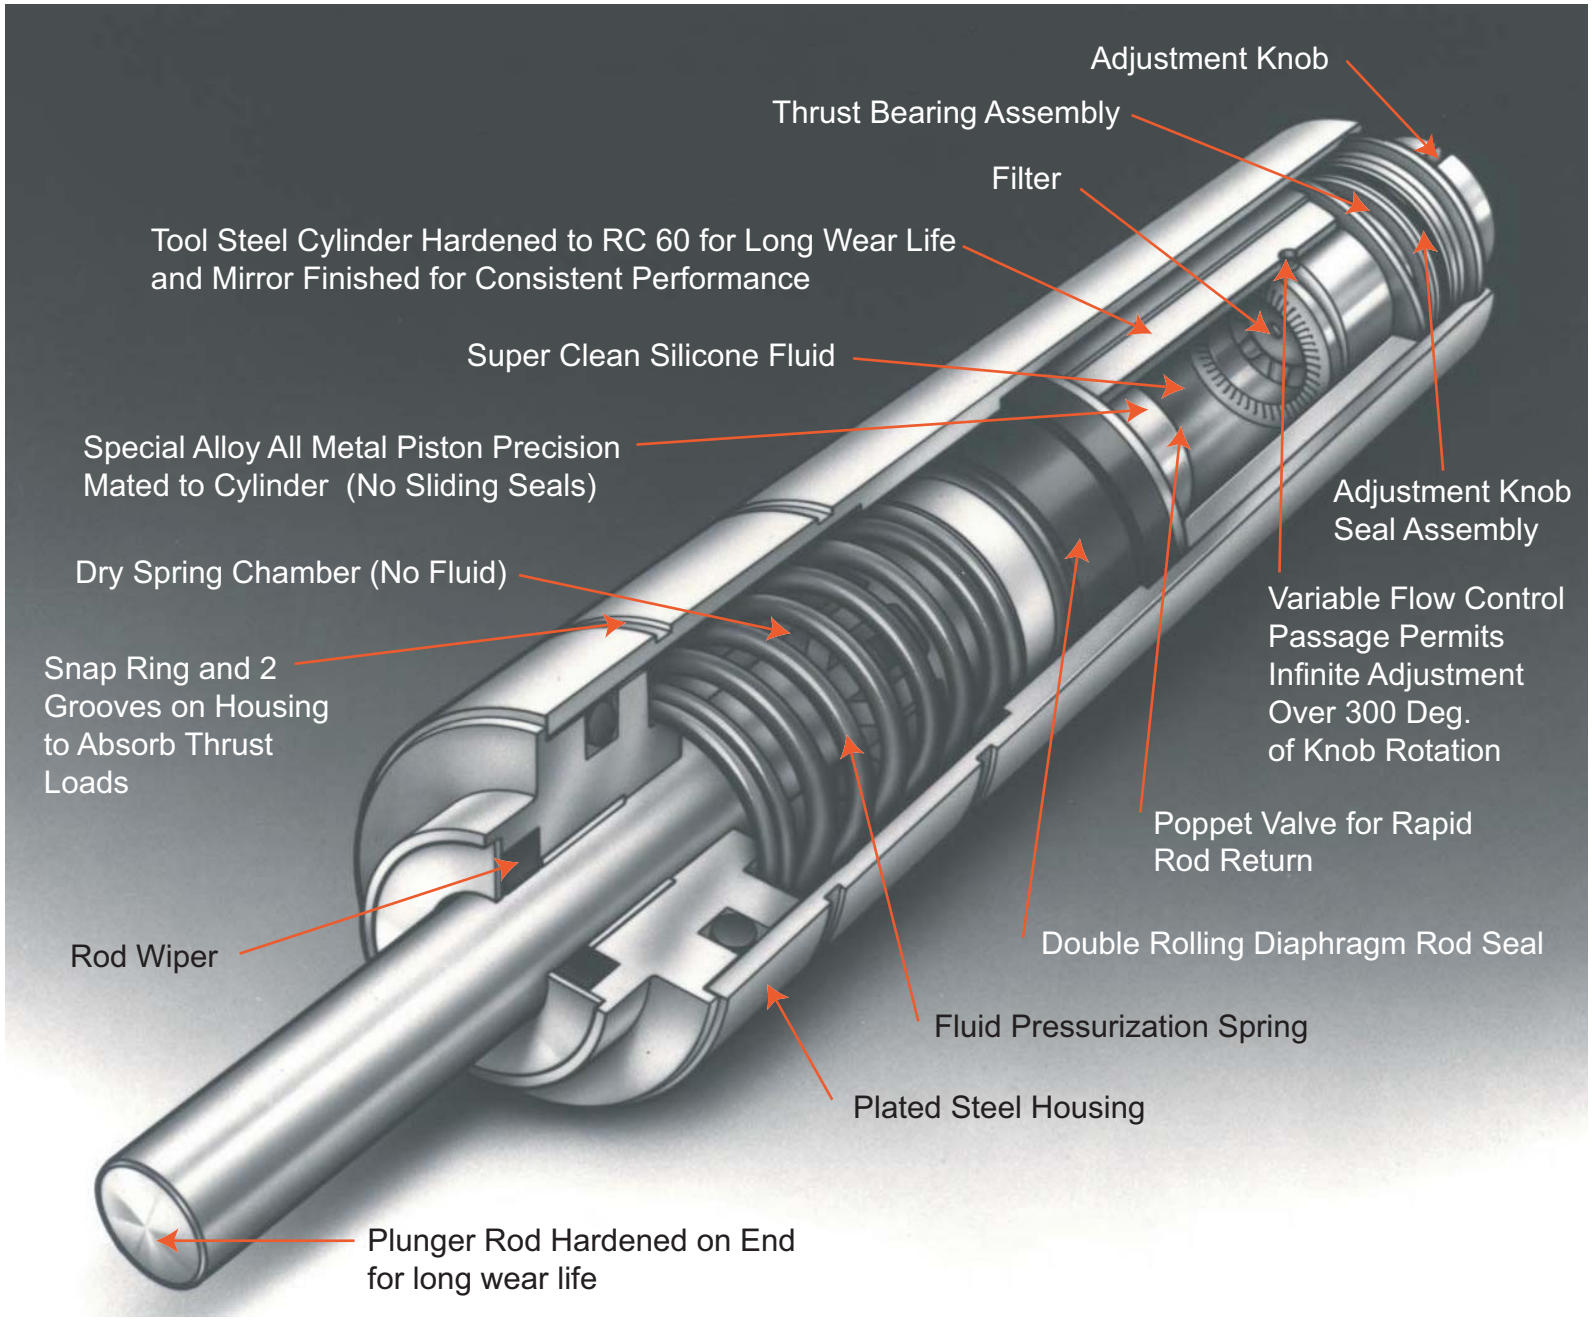
Adjustment Knob
Thrust Bearing Assembly
Filter
Tool Steel Cylinder Hardened to RC 60 for Long Wear Life and Mirror Finished for Consistent Performance
Super Clean Silicone Fluid
Special Alloy All Metal Piston Precision Mated to Cylinder (No Sliding Seals)
Adjustment Knob Seal Assembly
Dry Spring Chamber (No Fluid)
Variable Flow Control Passage Permits Infinite Adjustment Over 300 Deg. of Knob Rotation
Snap Ring and 2 Grooves on Housing to Absorb Thrust Loads
Poppet Valve for Rapid Rod Return
Rod Wiper
Double Rolling Diaphragm Rod Seal
Fluid Pressurization Spring
Plated Steel Housing
Plunger Rod Hardened on End for long wear life